



Back Light

K3232



Product Name	Dimensions
K3232	Widht: 275 mm
	Heigh: 55 mm
	Lenght: 275 mm

Number	Statement
1	Lighting Zone
2	Product Cable

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54



XX PRION

Prion Industrial Lighting

Back Light

K3232

1.FEATURES

• Lighting Color: 6000K, Green, Red

• Lighting Angle: 30°, 60°

• Intensity Of Illumination: 2,56 k lm

Led Number: 1024Input Voltage: 24 V

• Input Current (15 μs): 5,12 Amp

• Input Current (1 second): 3,2 Amp

• Input Current (1 minute): 2,56 Amp

• Input Current (continuous): 1,536 Amp

• Dimensions: 27,5 cm x 27,5 cm x 5,5 cm

• At Constant Voltage Operation: Have

• Diffusor Option: There Are

3.APPLICATIONS

- Engine Part Inspections
- Packaging Inspections
- Medical Bottle Inspections
- Food Package Inspections
- Surface Inspections
- Microscopic Camera Applications
- Particle Imaging in Liquid
- Particle Size Measurement
- Particle Counting
- Machine Vision
- Cell Identification
- Flame Length Measurement
- Edge Detection
- Material Strain Measurement (elongation / shortening / degradation)
- Motion Detection
- Product Counting
- Color Concentration Information
- Coordinate Information

2.DESCRIPTIONS

 Backlighting is a crucial and widely employed technique in image processing projects, offering various advantages across different applications.

- Particle Identification
- Cell Imaging
- Machine Monitoring
- Image Processing
- Industrial Led Lighting
- Conveyor Line Lighting
- Robot Vision ApplicationsIndustry 4.0 Applications
- Industry 4.0 Application
- Machine Lighting
- Bar Light
- Dark Field Light
- Panel Lighting
- Dark Effect Lighting
- Dome Light
- Ring Light
- Panel Light
- Back Light
- Dome Type
- Lighting






Back Light

K3232

4.LIGHT CHARACTERISTICS

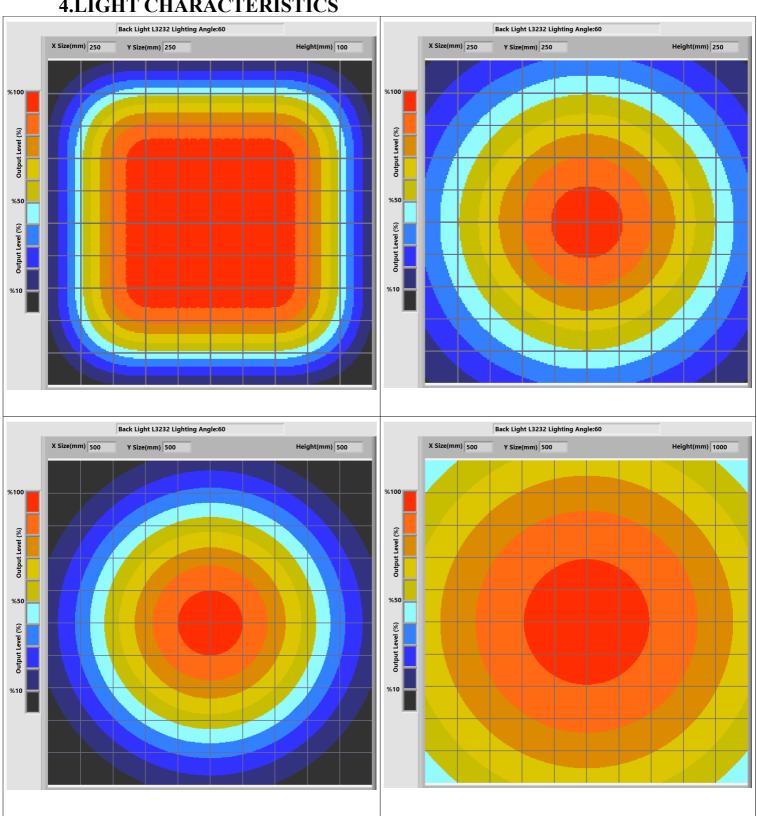




E-Mail: info@ludre.com.tr Contact: +90 216 519 08 54



Back Light

K3232

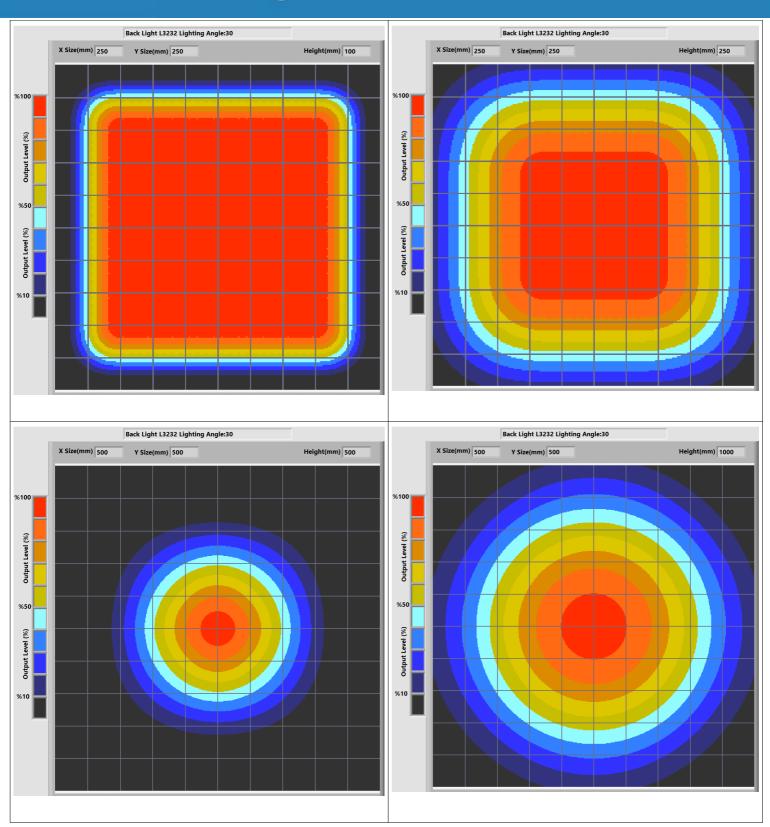






Back Light

K3232

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54

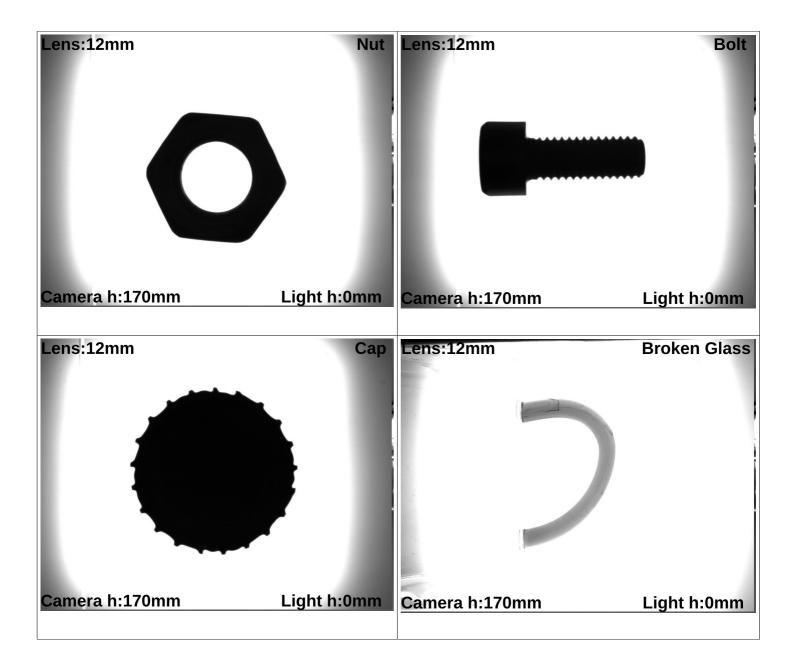





Back Light

K3232

5.PRODUCT USE



Mounting to the machines is possible with the bolt and nut assembly in the areas indicated in the adjacent image.

The points to be taken into consideration during this installation are as follows: The electronic parts should not be contacted while assembling the product.

In addition, if the product is not installed properly, vibrations that may occur will cause errors during measurement and control.



The product is powered by a 2M long cable fixed on it.

We need to make the 24V DC+ connection from our cable line with a red stripe, and we need to make the GND connection from our single color cable line.

When the supplies are connected in reverse, the product will not be damaged, but the product will not work. Cuts, breaks, etc. on the cable. If there is a problem, please contact us before using the product.



Back Light

K3232

6.DIMENSIONS

K3232

