

LUDRE TEST MEASUREMENT AND **QUALITY CONTROL SOFTWARE**

https://www.ludre.com.tr/

UPDATE: AUGUST 2022

Back Light L3224

1.FEATURES

Lighting Color: 6000K, Green, Red Lighting Angle: 30°, 60°

Lighting Intensity: 1.92 k lm

Number of Leds: 768 Input Voltage: 24 V

Input Current (15 µs): 3.84 Amp Input Current (1 second): 2.4 Amp Input Current (1 minute): 1.92 Amp Input Current (continuous): 1.152 Amp Dimensions: 22.5 cm x 22.5 cm x 2,5

cm

Constant Voltage Usage: Yes

Diffuser Option: Yes

2.DESCRIPTIONS

Backlight illuminations include various options suitable for projects with different angles and color options. It is used in all areas where there is a camera and used in the field of artificial image processing. however, it is preferred in machine lighting and used in special machine lighting.

3.APPLICATIONS

- **Engine Part Inspections**
- **Packaging Inspections**
- Medical Bottle Inspections
- Food Package Inspections
- **Surface Inspections**
- Microscopic Camera Applications
- Particle Imaging in Liquid
- Particle Size Measurement

- Cell counting
- Cell Identification
- Flame Length Measurement
- Edge Detection
- Material Strain Measurement (elongation / shortening / degradation)

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54

- **Motion Detection**
- **Product Counting**



LUDRE TEST MEASUREMENT AND QUALITY CONTROL SOFTWARE

A CONTRACTOR OF THE PERSON OF

https://www.ludre.com.tr/
UPDATE: AUGUST 2022

- Particle Counting
- Particle Identification
- Microscopic Camera Applications
- Cell Imaging
- Machine Monitoring
- Image Processing
- Industrial Led Lighting
- Conveyor Line Lighting
- Robot Vision Applications
- Industry 4.0 Applications
- Machine Lighting
- Bar Light
- Dark Field Light
- Panel Lighting
- Dark Effect Lighting

- Color Concentration Information Coordinate Information
- Velocity Measurement
- Obtaining Information such as Product Shape
- Volume, Faulty Product Elimination Machine Vision
- Test and Measurement
- Dome Light
- Ring Light
- Panel Light
- Back Light
- Dome Type
- Lighting
- Ring Lighting

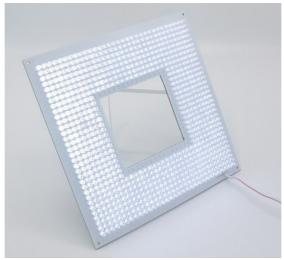


Figure 1. Back Light L3224

Product Name	Dimensions
Back Light L3224	Widht: 225 mm
	Heigh: 25 mm
	Lenght: 225 mm

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54



LUDRE TEST MEASUREMENT AND QUALITY CONTROL SOFTWARE

https://www.ludre.com.tr/
UPDATE: AUGUST 2022

Contents

1.FEATURES	1
2.DESCRIPTIONS	
3.APPLICATIONS	
4.DIMENSINONS	
5 DOCUMENTS	

E-Mail: info@ludre.com.tr Contact: +90 216 519 08 54



LUDRE TEST MEASUREMENT AND QUALITY CONTROL SOFTWARE

https://www.ludre.com.tr/

4.DIMENSIONS

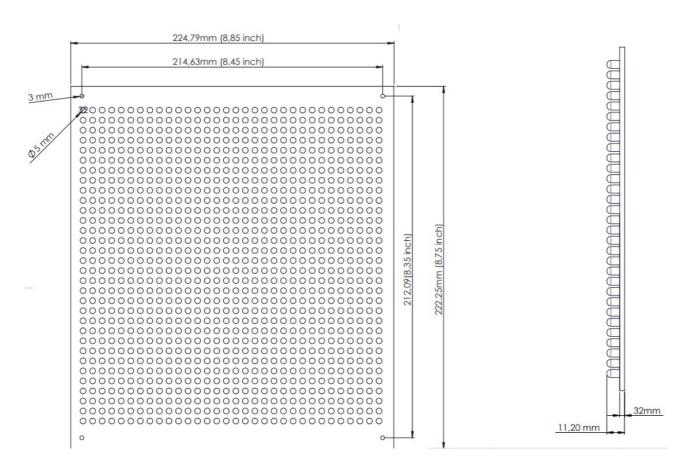


Figure 4. Back Light L3224 Dimensions

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54



LUDRE TEST MEASUREMENT AND **QUALITY CONTROL SOFTWARE**

https://www.ludre.com.tr/

UPDATE: AUGUST 2022

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54

5.DOCUMENTS

https://www.ludre.com.tr/back-light-13224/65

Backlighting is one of the most popular forms of vision inspection illumination, providing maximum contrast between object and scene and producing a high contrast image with consistent edge definition.

Commenly applied to measuring, defect and hole detection, and determining the orientation of parts.

Our range Backlights includes several models, colours and lengths and there are also custom orders available.

Area lights are used to illuminate backgrounds and check contours and thereby for the camera top view for the outline detection of objects.

The lighting systems are available in all application-relevant color temperatures and can be used for objects with sizes.