


DFX1



Product Name	Dimensions
	Widht: 264 mm
	Heigh: 77 mm
	Lenght: 25 mm

Number	Statement
1	Camera Zone
2	Lighting Zone
3	Product Cable

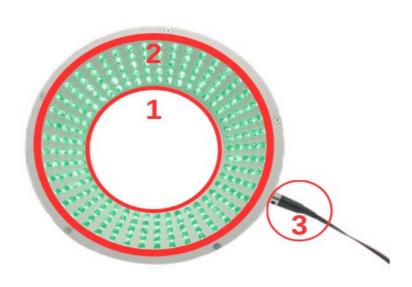



DFX1

1.FEATURES

- Lighting Color: Green
- Lighting Angle: 30°, 60°
- Intensity Of Illumination:0,96 k lm
- Led Number: 1600
- Input Voltage: 24 V
- Input Current (15 μs) : 5,3 Amp
- Input Current (1 second): 3,3 Amp
- Input Current (1 minute): 2,5 Amp
- Input Current (continuous): 1,6 Amp Dimensions: 26,4 cm x 7,7 cm x 2,5 cm
- At Constant Voltage Operation: Have
- Diffusor Option: There Are

3.APPLICATIONS

- Engine Part Inspections
- Packaging Inspections
- Medical Bottle Inspections
- Food Package Inspections
- Surface Inspections
- Microscopic Camera Applications
- Particle Imaging in Liquid
- Particle Size Measurement
- Particle Counting
- Machine Vision
- Cell Identification
- Flame Length Measurement
- Edge Detection
- Material Strain Measurement (elongation / shortening / degradation)
- Motion Detection
- Product Counting
- Color Concentration Information
- Coordinate Information

2.DESCRIPTIONS

 High Angle lighting is another specialized illumination technique used in image processing projects. In this technique, the light source is directed at a high angle towards the object, providing various advantages.


- Particle Identification
- Cell Imaging
- Machine Monitoring
- Image Processing
- Industrial Led Lighting
- Conveyor Line Lighting
- Robot Vision Applications
- Industry 4.0 Applications
- Machine Lighting
- Bar Light
- Dark Field Light
- Panel Lighting
- Dark Effect Lighting
- Dome Light
- Ring Light
- Panel Light
- Back Light
- Dome Type
- Lighting





DFX1


4.LIGHT CHARACTERISTICS

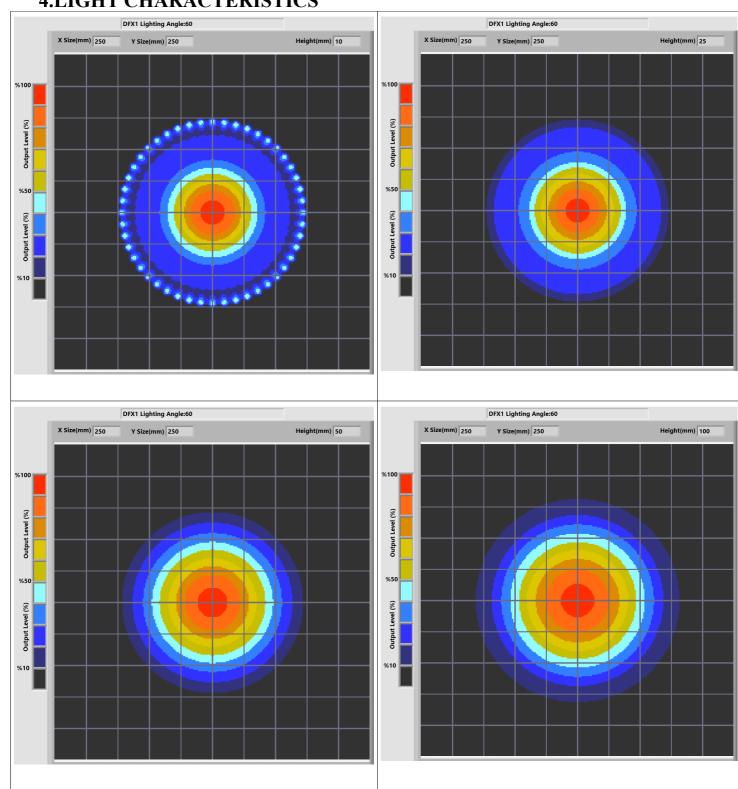





DFX1

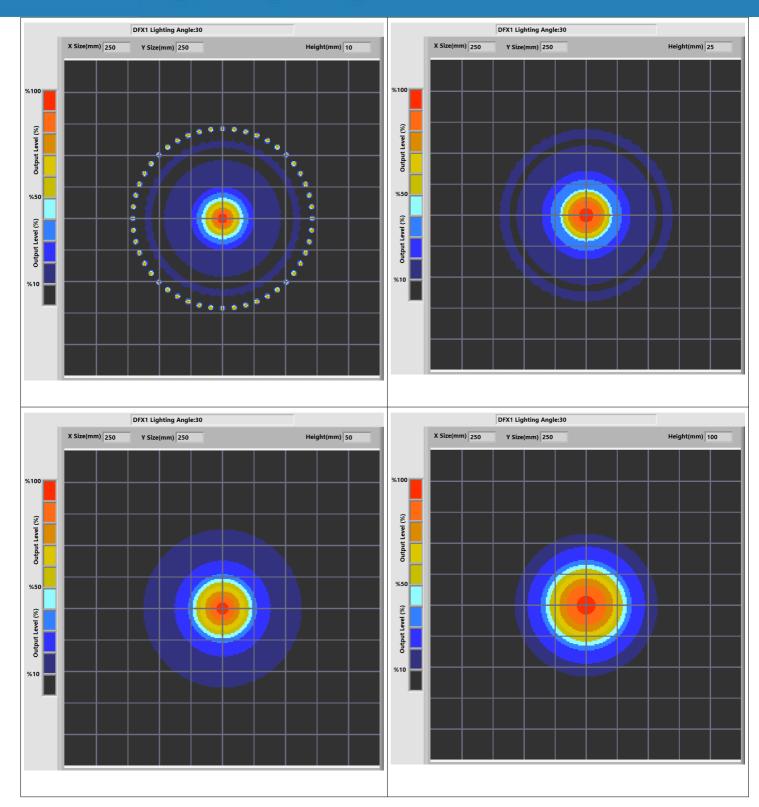






DFX1

E-Mail: info@ludre.com.tr Contact: +90 216 519 08 54

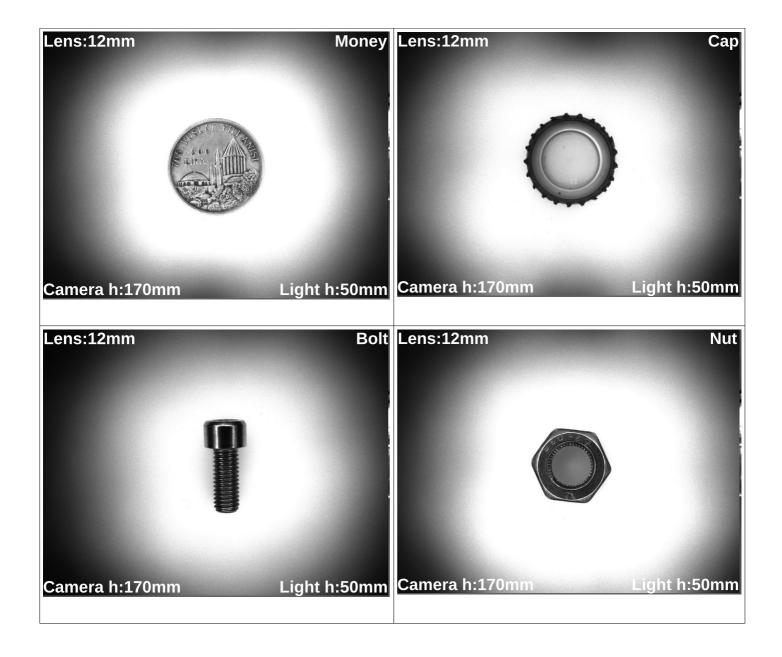






DFX1

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54

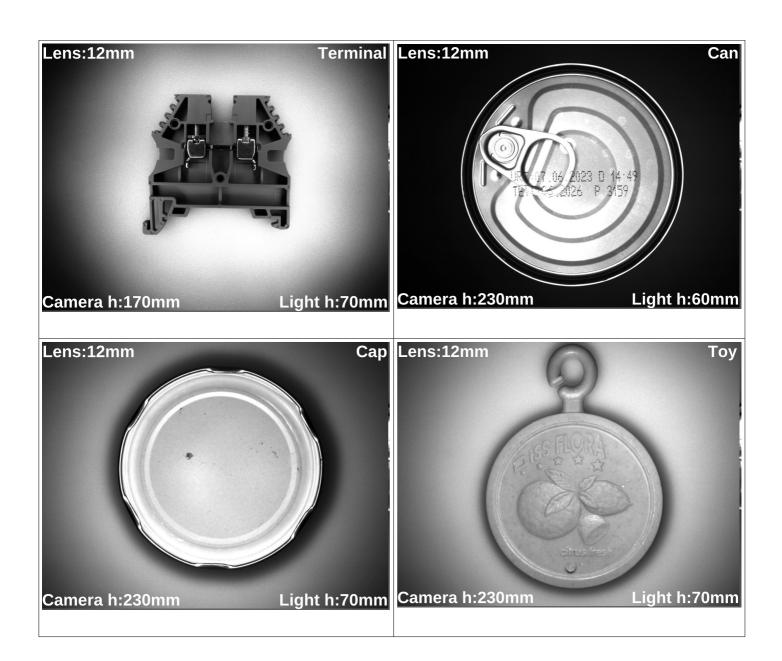




DFX1

E-Mail: info@ludre.com.tr

Contact: +90 216 519 08 54

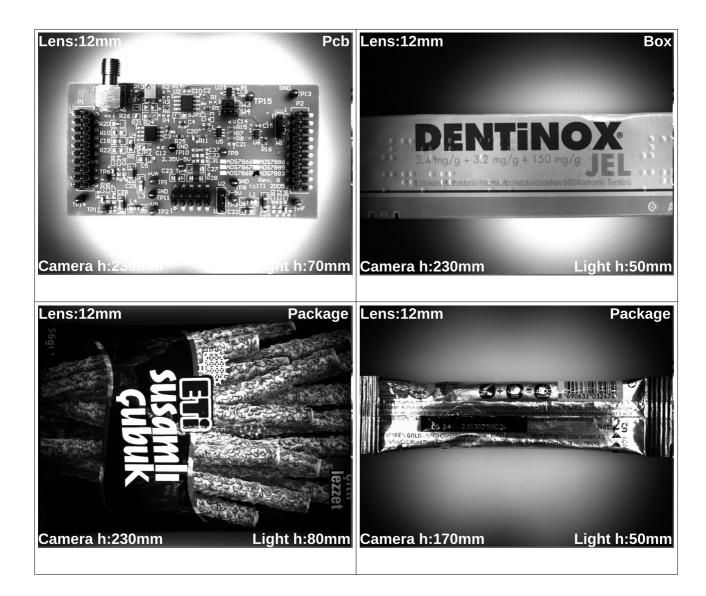





DFX1

5.PRODUCT USE



Mounting to the machines is possible with the bolt and nut assembly in the areas indicated in the adjacent image.

The points to be taken into consideration during this installation are as follows: The electronic parts should not be contacted while assembling the product.

In addition, if the product is not installed properly, vibrations that may occur will cause errors during measurement and control.



The product is powered by a 2M long cable fixed on it.

We need to make the 24V DC+ connection from our cable line with a red stripe, and we need to make the GND connection from our single color cable line.

When the supplies are connected in reverse, the product will not be damaged, but the product will not work. Cuts, breaks, etc. on the cable. If there is a problem, please contact us before using the product.





DFX1

6.DIMENSIONS

DFX1

